




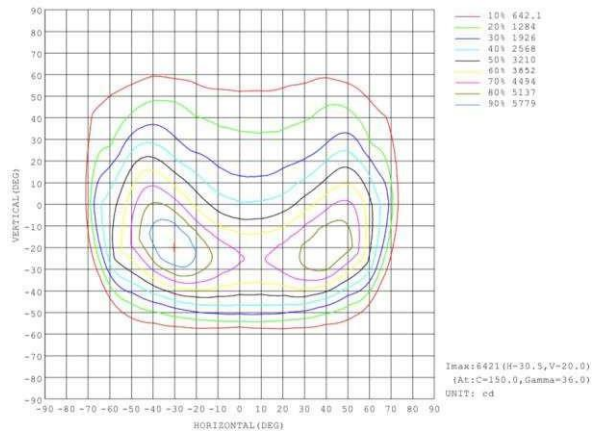




Art.Nr. **LSL513**

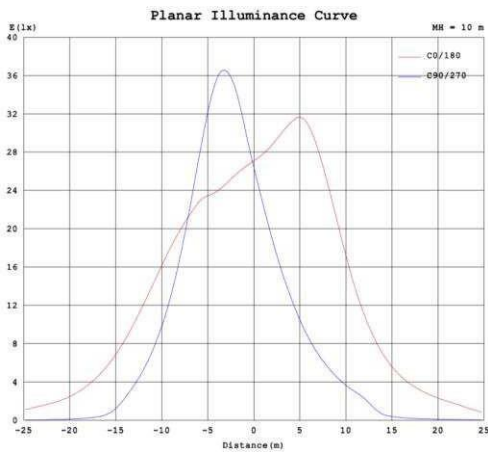

- 80W
- 10500Lm
- 2700K – warm white
- IP65
- AC100 - 277V
- PF > 0,95
- IK08
- Anti-corrosion gray coating of the corpus
- Dimension 550 x 215 x 80 mm
- Angle of light 70 x 140°
- 50 000h
- E
- Warranty 5 years ( ZH DRIVER, HONGLI LED )
- Recommended ambient temperature -25° to +50°C
- Weight netto - 2400g
- Outrigger with Ø 60 mm
- Packing 1/10

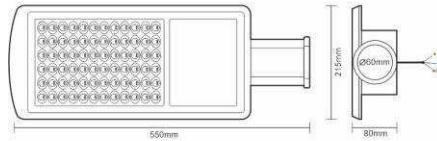




Art.Nr. **LSL513**

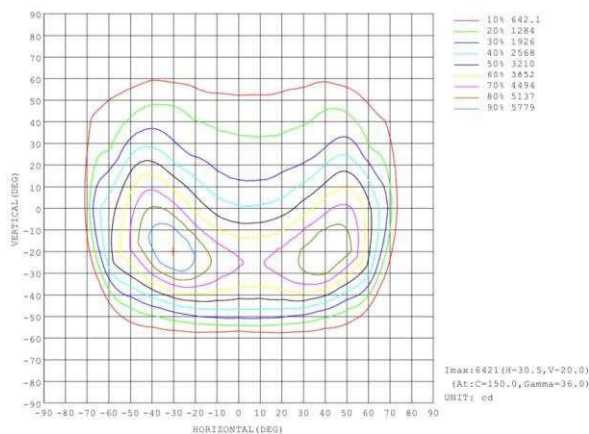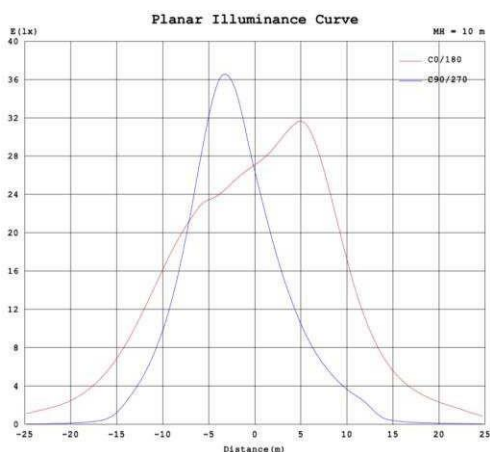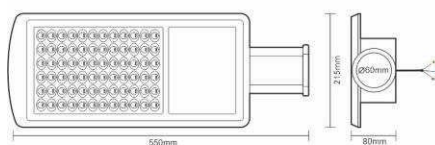

- 80W
- 10500Lm
- 2700K – teplá biela
- IP65
- AC100 - 277V
- PF > 0,95
- IK08
- Antikorózný šedý nástrek korpusu
- Rozmer 550 x 215 x 80 mm
- Uhol svetla 70 x 140°
- 50 000h
- E
- Záruka 5 rokov ( ZH DRIVER, HONGLI LED )
- Doporučená teplota okolia -25° až +50°C
- Hmotnosť netto - 2400g
- Montáž na výložník Ø 60 mm
- Balenie 1/10






Art.Nr. **LSL513**

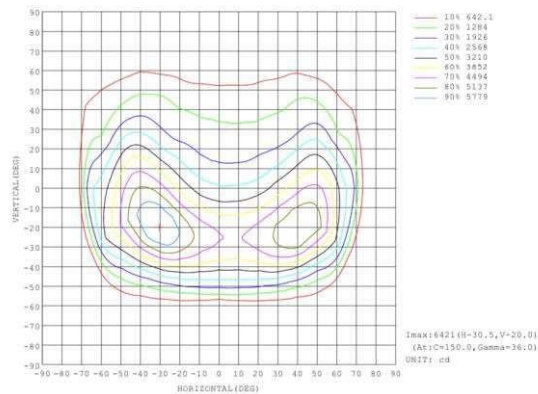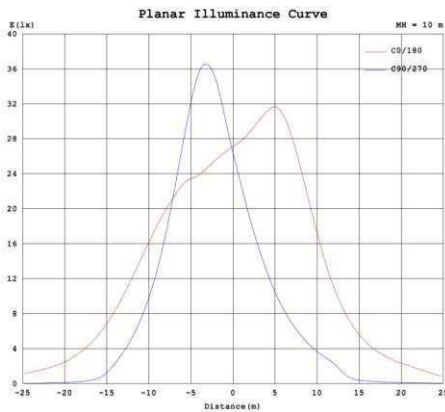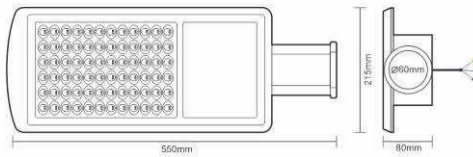

- 80W
- 10500Lm
- 2700K – teplá bílá
- IP65
- AC100 - 277V
- PF > 0,95
- IK08
- Antikorózní šedý nástřik korpusu
- Rozměr 550 x 215 x 80 mm
- Úhel světla 70 x 140°
- 50 000h
- E
- Záruka 5 let ( ZH DRIVER, HONGLI LED )
- Doporučená teplota okolí -25° až +50°C
- Hmotnost netto - 2400g
- Montáž na výložník Ø 60 mm
- Balení 1/10






Art.Nr. **LSL513**

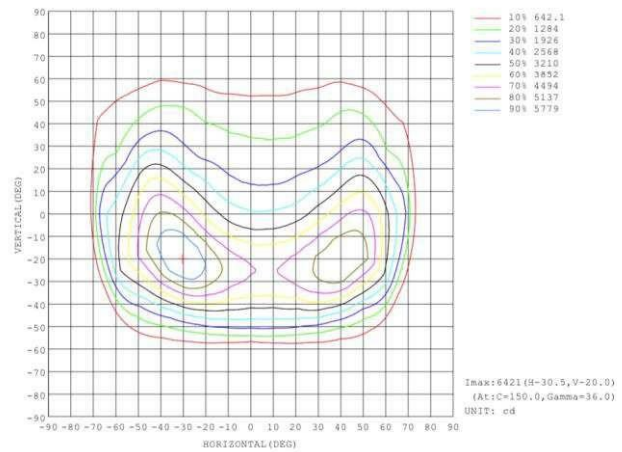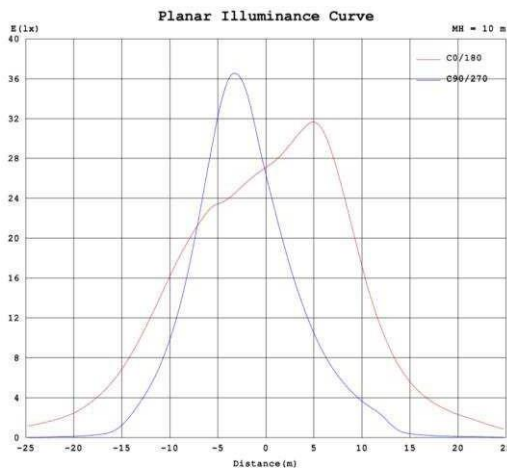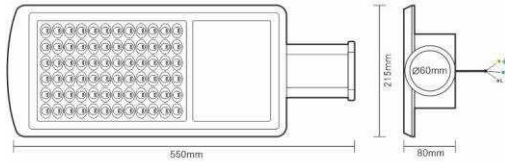

- 80W
- 10500Lm
- 2700K - meleg fehér
- IP65
- AC100 - 277V
- PF > 0,95
- IK08
- A karosszéria korróziógátló szürke korpusz
- Méret 550 x 215 x 80 mm
- Sugárzási szög 70 x 140°
- 50 000h
- E
- 5 év garancia ( ZH DRIVER, HONGLI LED )
- Ajánlott környezeti hőmérséklet -25° és +50°C
- Nettó tömeg - 2400g
- Szerelhető kiállásra Ø 60 mm
- Csomagolás 1/10



Art.Nr. **LSL513**

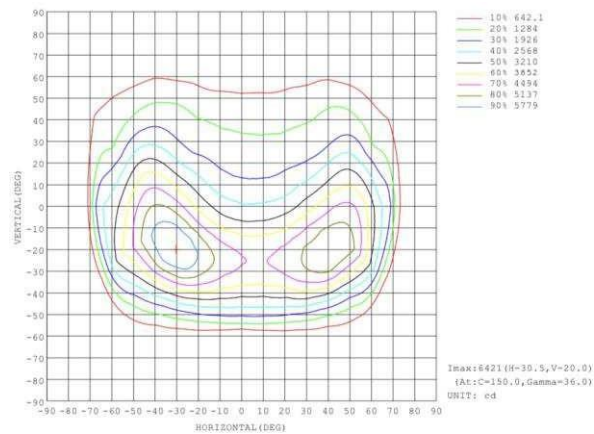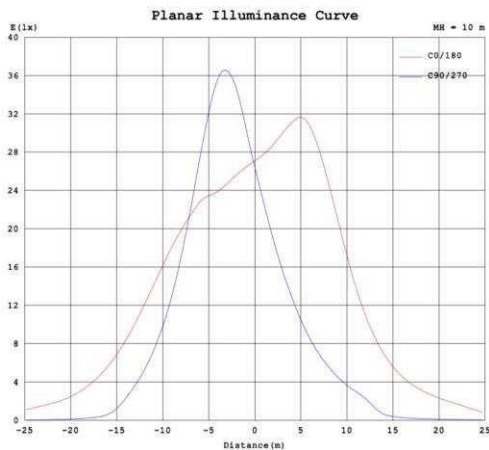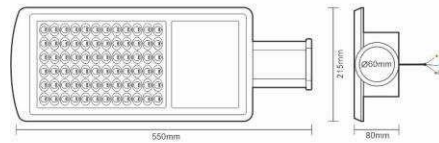

- 80W
- 10500Lm
- 2700K- warmes Weiß
- IP65
- AC100 - 277V
- PF > 0,95
- IK08
- Graue Korrosionsschutzbeschichtung des Gehäuses
- Dimension 550 x 215 x 80 mm
- Lichtwinkel 70 x 140°
- 50 000St
- E
- Garanzzeit 5 Jahre ( ZH DRIVER, HONGLI LED )
- Empfohlene Umgebungstemperatur -25° bis +50°C
- Nettogewicht - 2400g
- Aufbau zum Ausleger Ø 60 mm
- Verpackung 1/10